



\*NOTE - A minimum 38mm ventilation cavity is required for a baffle jointed system.

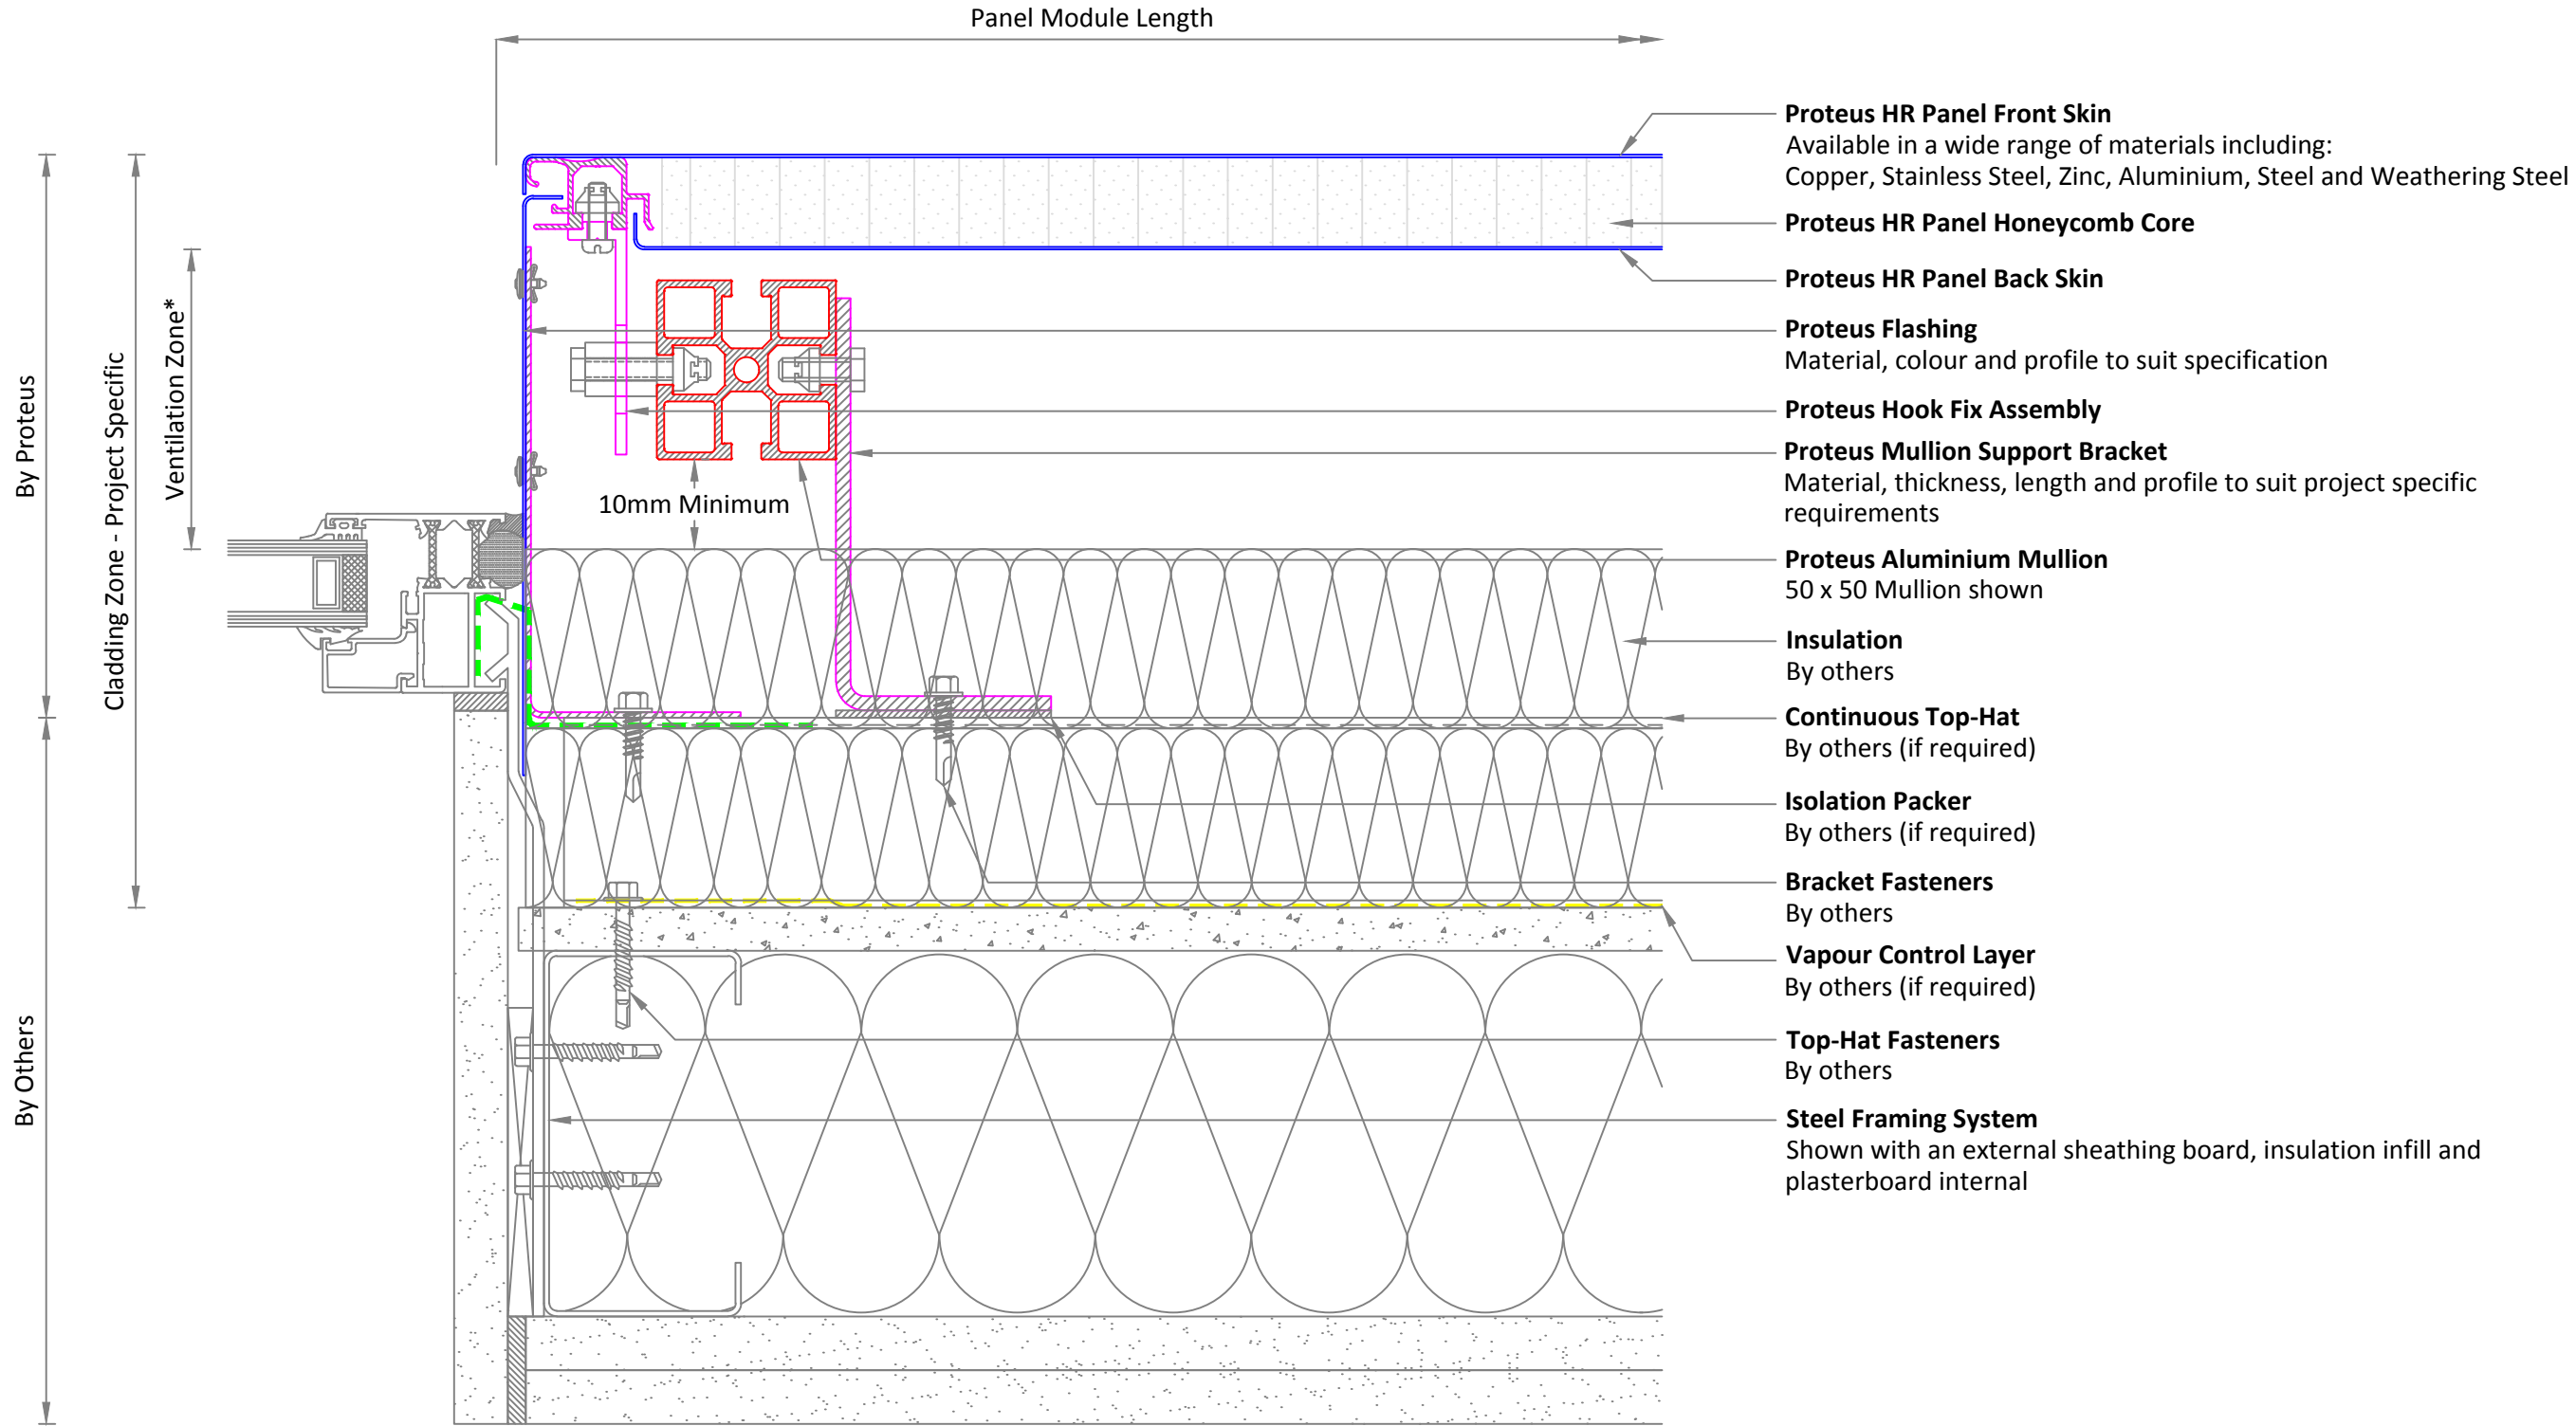

C B A	04.09.18 26.07.17 04.03.14	General Updates Added Insulation Layer Single fold/Top-hat	AF LK RJ	<div><div>ENGINEERED FACADE TECHNOLOGY</div><div>1 Gerrard Place Skelmersdale Lancashire WN8 9SU United Kingdom</div><div>Tel No: +44 (0) 151 545 5075 E-mail: info@proteusfacades.com</div></div>	All copyright and design right contained within this document is the property of Proteus and may not be reproduced without the written consent of Proteus.	System Proteus HR				
						Title Panel to Window Jamb (Recessed With Aligned Flashing)				
						Section Horizontal	Structure SFS	Panel Type Flat	Carrier 50x50	Fixing Type Hook
						Drawn By RJ	Drawn Date Oct 11	Checked By SRG	Checked Date 21.01.19	Scale 1:2
Revision	Date	Amendment	Drawn		DO NOT SCALE FROM THIS DRAWING	Proteus reference no. HR-020		Drawing Size A3	Revision C	